
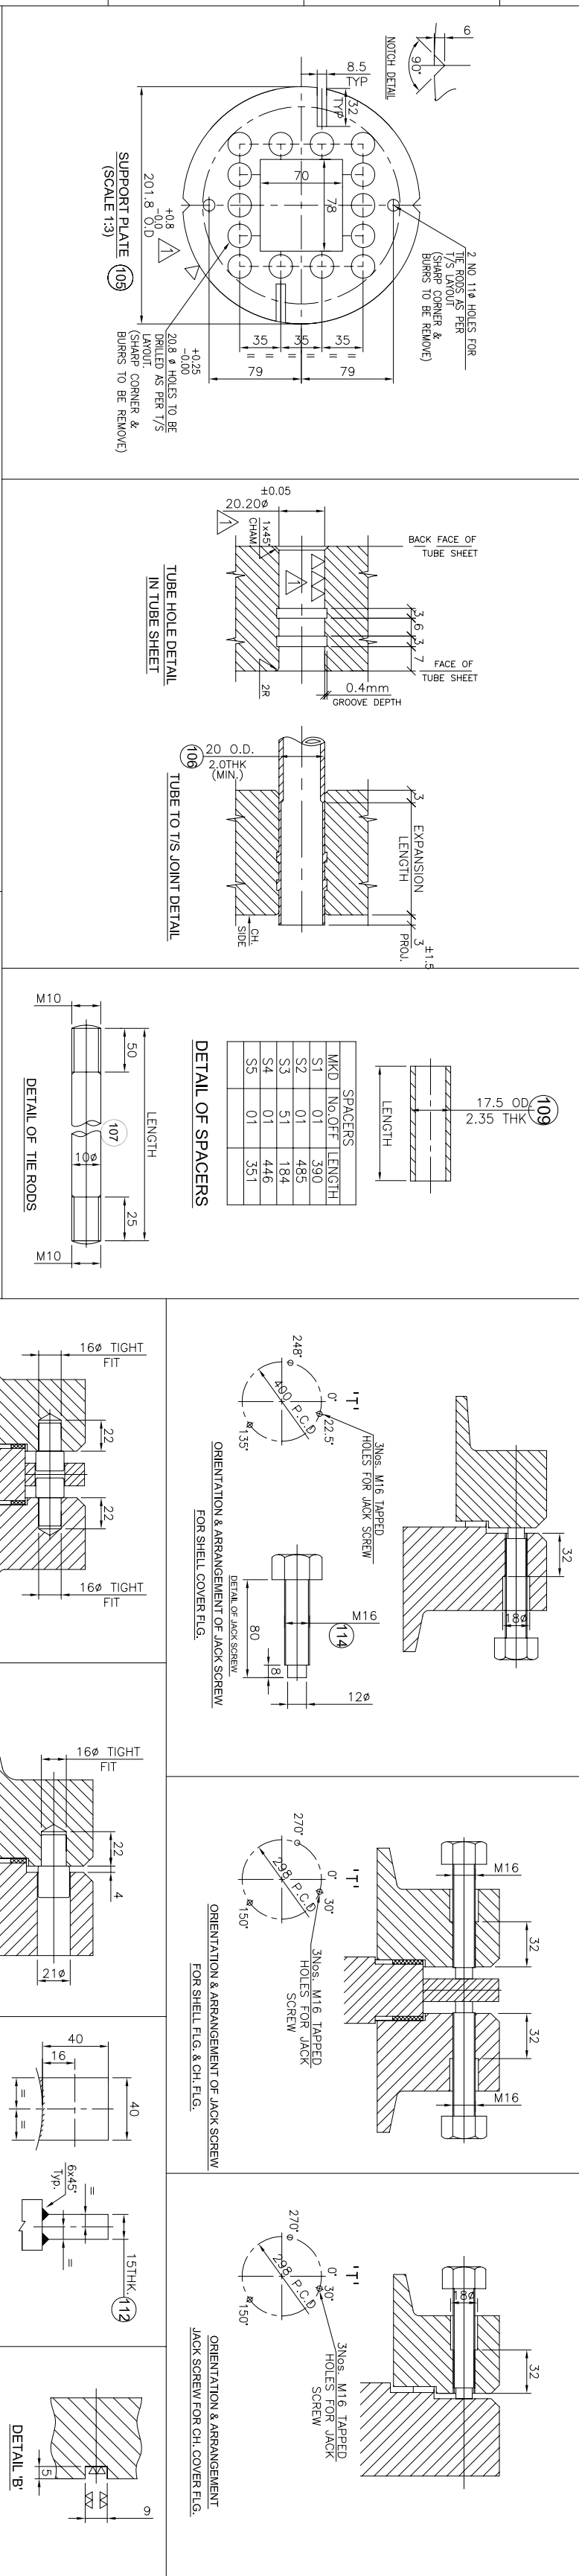



1. ALL DIMENSIONS ARE IN mm, UNLESS OTHERWISE SPECIFIED.
2. FOR GENERAL LAYOUT, ORIENTATION, NOZZLE SCHEDULE & DESIGN DATA REFER TO THE GENERAL LAYOUT SHEET.
3. FOR NOZZLE DETAIL & SADDLE DETAIL, REF. DWG. (SH 3 OF 6)

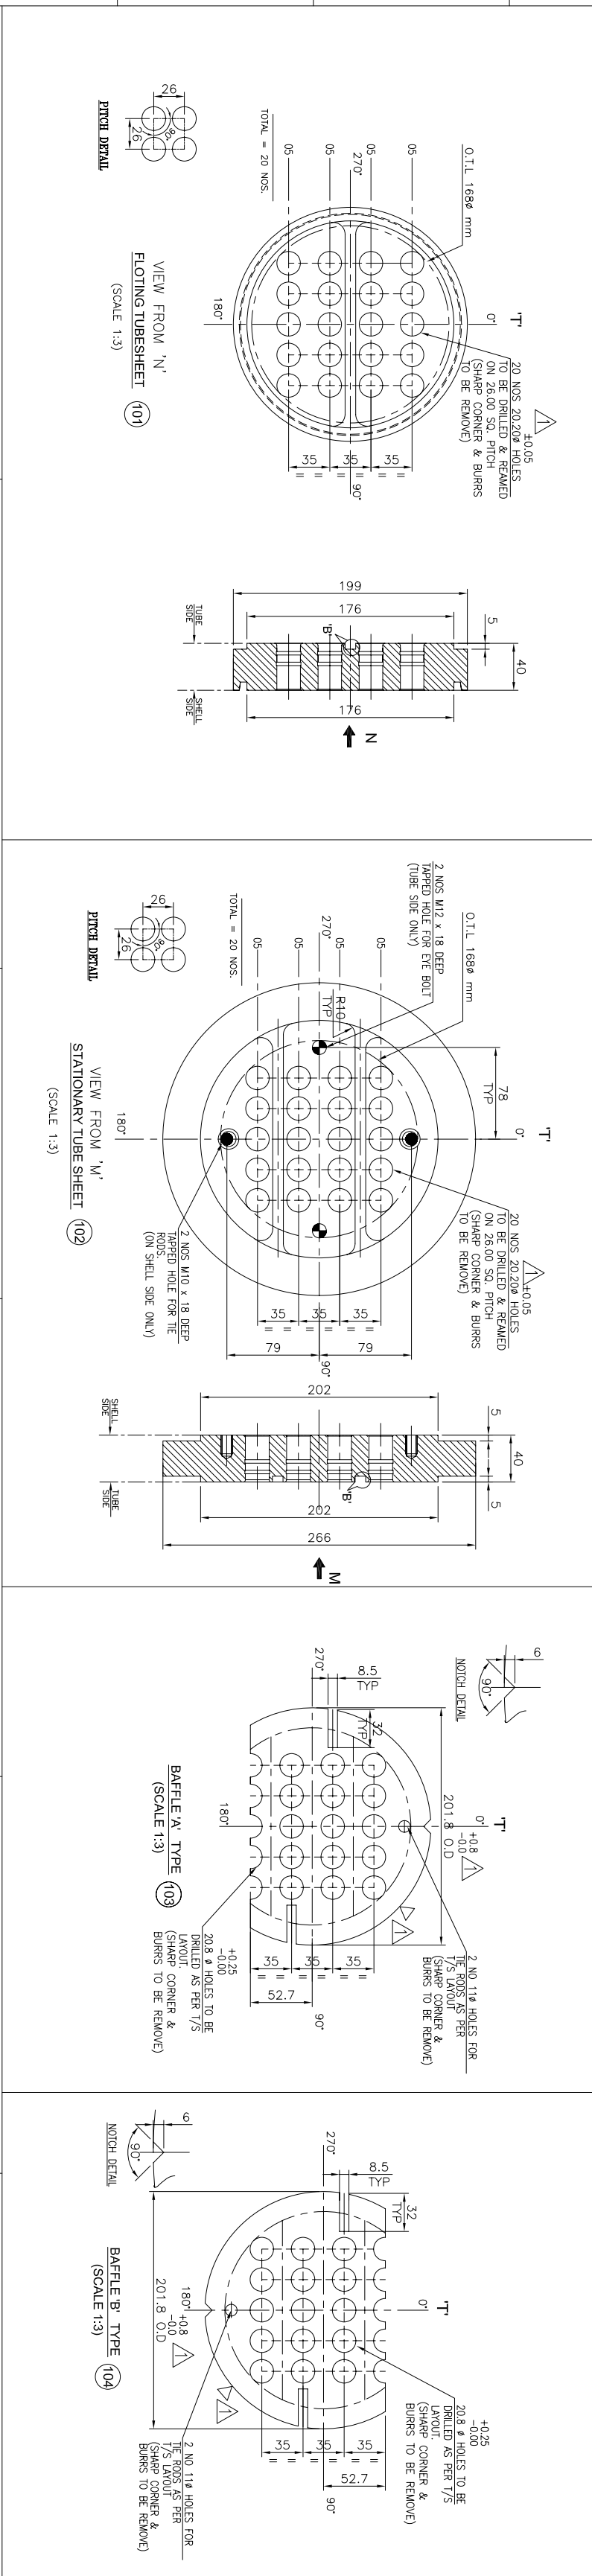

117	SEALING STRIPS	SA 516 GR. 60	2	5820 LG. x 12 x 8 THK
118	DOWEL PINS	IS 2062 GR. B	4	168 SEE DETAIL
119	JACK SCREWS	SA 193 GR. B7	16	M20 x 120 LG.
120	DOWEL PIN LOCATING P.L.T.	SA 516 GR. 60	2	40 x 40 x 15 THK
121	JACK SCREW STOPPER P.L.T.	SA 516 GR. 60	2	M12 SEE DETAIL
122	PULLING STRIP FOR T/S PULLING	SA 105	2	M12 SEE DETAIL
123	EYE BOLTS FOR T/S PULLING	IS 1238 GR. B	2	M20 x 150 LG.
124	SPACER LOOK NUT	IS 2062 GR. B	2	M10 x 5845 LG.
125	TIE ROD	IS 2062 GR. B	2	20 20 0.5 x 220THK x 6000 LG.
126	TUBES	SA 179	1	254.2 8 x 10 THK.
127	SUPPORT PLATE 'B'	IS 2062 GR. B	1	254.2 8 x 10 THK.
128	BAFFLES TYPE 'B'	IS 2062 GR. B	27	6 THK. SEE DETAIL
129	BAFFLES TYPE 'A'	IS 2062 GR. B	27	6 THK. SEE DETAIL
130	STATIONARY TUBE SHEET	SA 266 GR. 4	1	266 OD x 40 THK.
131	FLOATING TUBE SHEET	SA 266 GR. 4	1	199 OD x 40 THK.

△ BILL OF MATERIAL

SPACE FOR PKG. STAMPING

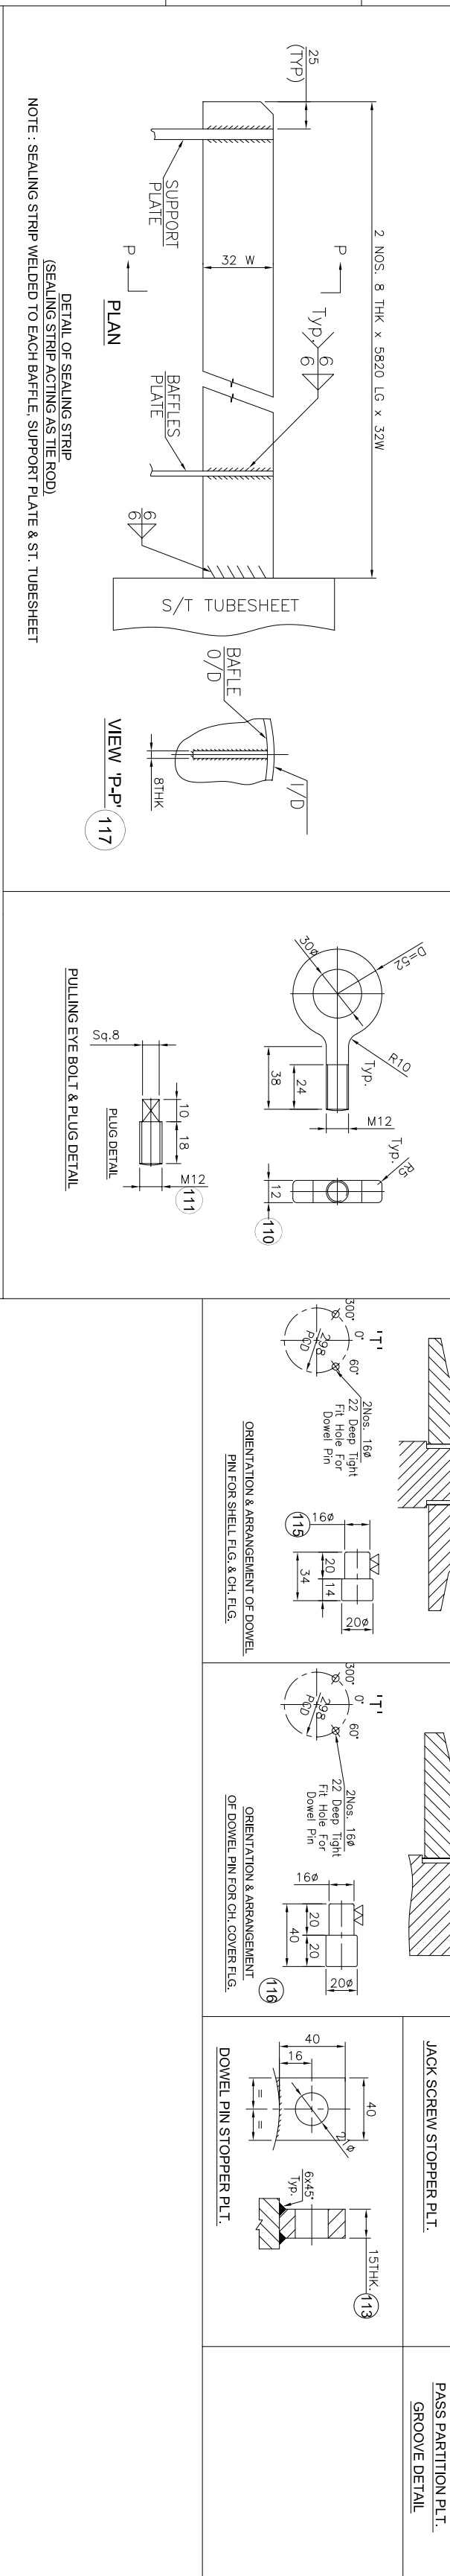

OWNER:	BCPL
PROJECT:	ECU

