


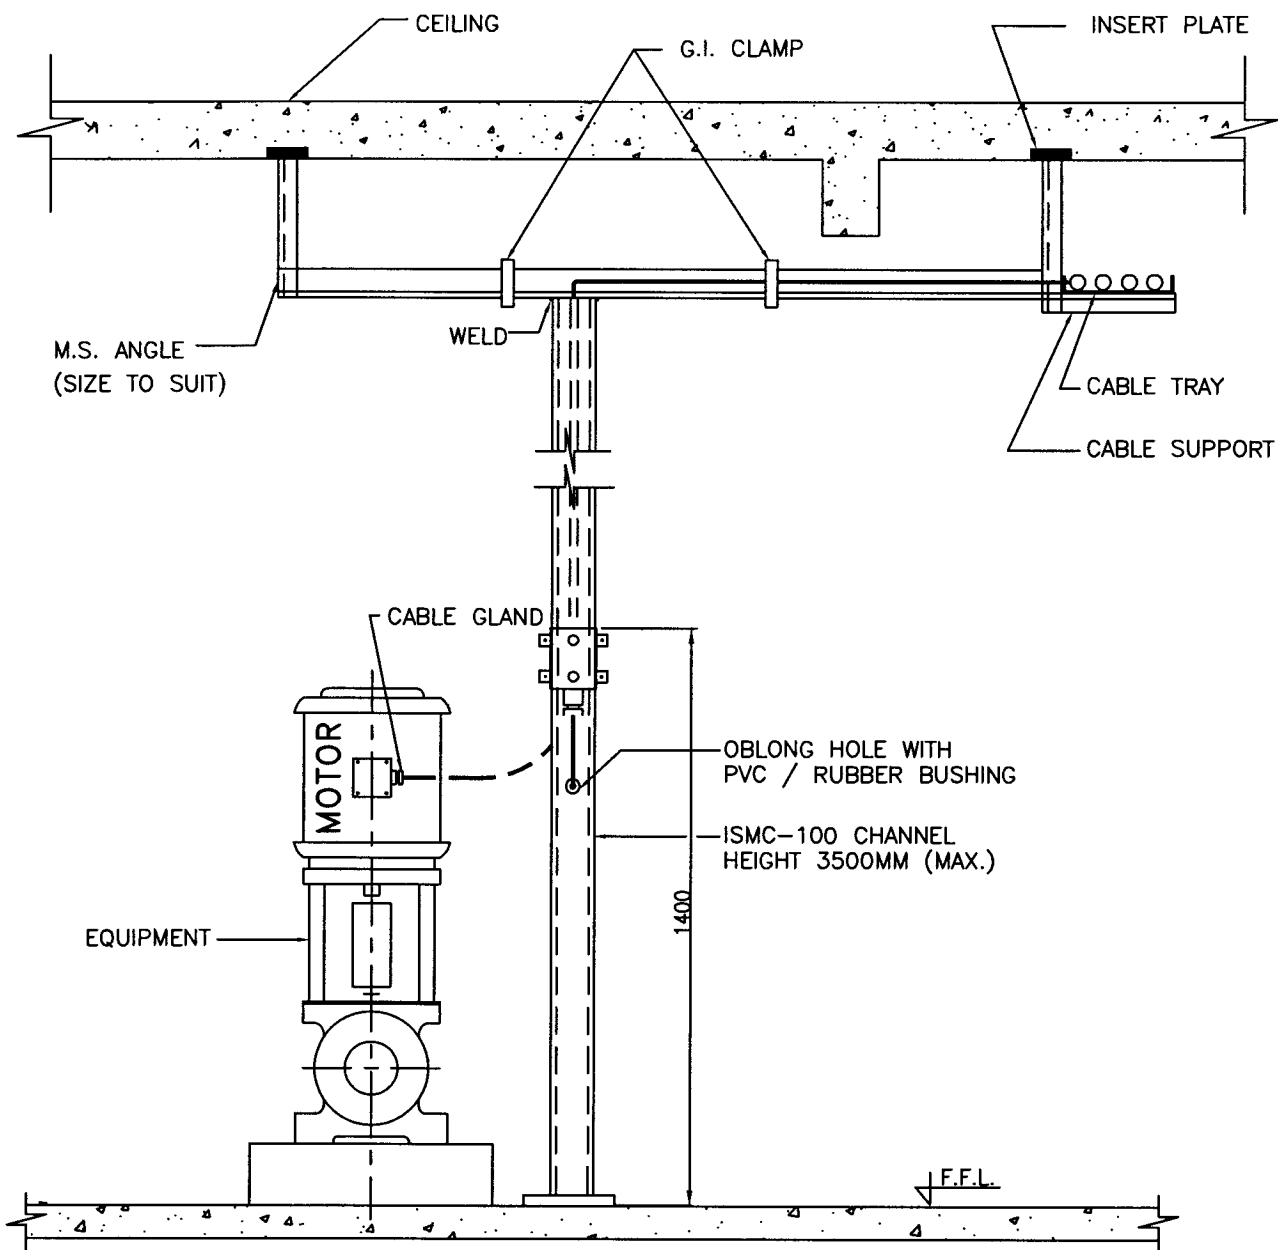

NOTES:—

1. ALL DIMENSIONS ARE IN MM.
2. WHERE FEASIBLE MAIN CABLE TRAY CAN BE ROUTED IN SUCH A WAY THAT ISMC CHANNEL CAN BE DIRECTLY WELDED TO TRAY / SUPPORT.

4	21.11.13	REAFFIRMED & ISSUED AS STANDARD	BP	FA/SA	UAP/JMS	SC
3	13.02.09	REAFFIRMED & ISSUED AS STANDARD	BP	RKS/NS	JMS	VC
Rev. No.	Date	Purpose	Prepared by	Checked by	Std. Committee Convenor	Std. Bureau Chairman
Approved by						