



FOLDER-II

दर अनुसूची (एसओआर) **SCHEDULE OF RATES [PRICED SOR]** **(FINANCE/ PRICE BID)**

(Scan copy to be uploaded in Folder –II (FINANCIAL/ PRICE BID))



ब्रह्मपुत्र क्रेकर और पालीमेर लिमिटेड
BRAHMAPUTRA CRACKER AND POLYMER LIMITED
 (भारत सरकार का उपक्रम) / (A Government of India Enterprise)


SCHEDULE OF RATES (SOR) - PRICED BID

(BIDDER TO MENTION "**PRICE**" IN PRICED SOR)

e-TENDER No.: BCPL/C&P/LE17S495BB/01316

"PROCUREMENT OF SPARE MOTORS FOR LLDPE / HDPE UNIT" OF BCPL, LEPETKATA.

Item No.	Material Code	Material Description	Offered Make	HSN Code of Material	U O M	Q T Y	Per Unit Price Ex-works [Including Packing & Forwarding, Duties & excluding Freight]		Per Unit Freight upto BCPL Site at Lepetkata Applicable on (H) only		Per Unit GST (CGST & SGST/UTGST or IGST) Mark (✓) on the applicable one above. Applicable on (H+K) only		Per Unit Tax Input credit on GST (CGST & SGST/UTGST or IGST) as applicable		Per Unit FOT Site BCPL Lepetkata Basis (P=H+K+M)	Total FOT site BCPL Lepetkata Basis Amount Q=(P*G)
							(In numerical) Rs.	(In words) Rs.	%	Rs.	%	Rs.	%	Rs.	Rs.	Rs.
A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
1	6505990033	MTR, V1, 90L, Y, 55, 4, 3 PH, 1415, 1.5 KW <u>Long Text:</u> "MOTOR, ELECTRIC, MOUNTING: V1, FRAME SIZE: 90L, INSULATION CLASS: F, INGRESS PROTECTION: IP55, NO. OF POLES: 4, CLASSIFICATION HAZARD: EXD, FREQUENCY: 50 HZ, PHASE: 3 PH, SPEED: 1415, POWER RATING: 1.5 KW, MOTOR TAG NO. 117-PA-511 NAME: LRU COLUMN FEED PUMP KW 1.5, VOLTAGE: 415 +/- 10%, WINDING CONNECTION: DELTA, NO. OF POLES: 6 FRAME SIZE: 100L MOUNTING: V1 DUTY: S1, METHOD OF STARTING: DOL INSULATION CLASS: F COOLING: TEFC, TEMPERATURE CLASS: T4 GAS GROUP: IIC, EXPLOSION PROTECTION: EX D INGRESS PROTECTION: IP55 FULL, LOAD RPM : 955 BEARING TYPE: AS PER MANUFACTURER, THERMISTOR: NOT REQUIRED, VPI : YES"			EA	1										
2	6505990023	MTR, V1, 100L, Y, 55, 6, 3 PH, 955, 1.5 KW <u>Long Text:</u> "MOTOR, ELECTRIC, MOUNTING: V1, FRAME SIZE: 100L, INSULATION CLASS: F, INGRESS PROTECTION: IP55, NO. OF POLES: 6, CLASSIFICATION HAZARD: EXD, FREQUENCY: 50 HZ, PHASE: 3 PH, SPEED: 955, POWER RATING: 1.5 KW, MOTOR TAG NO.: 117-PA-511 NAME LRU COLUMN FEED PUMP KW: 1.5, VOLTAGE: 415 +/- 10%, WINDING CONNECTION: DELTA, NO. OF POLES: 6 FRAME SIZE: 100 L MOUNTING: V1, DUTY: S1 METHOD OF STARTING: DOL INSULATION CLASS: F, COOLING: TEFC TEMPERATURE CLASS: T4 GAS GROUP: IIC, EXPLOSION PROTECTION: EX D INGRESS PROTECTION: IP55, FULL LOAD RPM: 955 BEARING TYPE: AS PER MANUFACTURER, THERMISTOR: NOT REQUIRED VPI: YES"			EA	1										




ई-निविदा संख्या / e-TENDER No: BCPL/C&P/LE17S495BB/01316 FOR "PROCUREMENT OF SPARE MOTORS FOR LLDPE / HDPE UNIT" OF BCPL, LEPETKATA.




ब्रह्मपुत्र क्रेकर और पालीमेर लिमिटेड
BRAHMAPUTRA CRACKER AND POLYMER LIMITED
(भारत सरकार का उपक्रम) / (A Government of India Enterprise)

6	6503120233	MTR, MONTING, 90L, Y, 55, 4, 3 PH, 1410, 1.1 KW <u>Long Text:</u> "MOTOR, ELECTRIC, MOUNTING: B3, FRAME SIZE: 90L, INSULATION CLASS: F, INGRESS PROTECTION: IP55, NO. OF POLES: 4, CLASSIFICATION HAZARD: EXD, FREQUENCY: 50 HZ, PHASE: 3 PH, SPEED: 1410, POWER RATING: 1.1 KW, MOTOR TAG NO.: 117-PM-935 NAME: LO PUMP FOR ETHYLENE, COMPRESSOR KW 1.1 VOLTAGE 415 +/- 10% WINDING CONNECTION, DELTA NO. OF POLES: 4 FRAME SIZE : 90L MOUNTING: B3, DUTY: S1 METHOD OF STARTING: DOL INSULATION CLASS: F, TEFC TEMPERATURE CLASS: T5 GAS GROUP: IIA,IIB, EXPLOSION PROTECTION: EX D INGRESS PROTECTION: IP55, FULL LOAD RPM: 1410 BEARING TYPE : 6205-2Z/C3, THERMISTOR : NOT REQUIRED VPI : YES"			EA	1									
7	6503120223	MTR, MONTING, 315 L, Y, 55, 4, 3 PH, 1490, 150 KW <u>Long Text:</u> "MOTOR, ELECTRIC, MOUNTING: B3, FRAME SIZE: 315L, INSULATION CLASS: F, INGRESS PROTECTION: IP55, NO. OF POLES: 4, CLASSIFICATION HAZARD: EXD, FREQUENCY: 50 HZ, PHASE: 3 PH, SPEED: 1490, POWER RATING: 150 KW, MOTOR TAG NO.: 117-KM-930 NAME: ETHYLENE COMPRESSOR, KW: 150 VOLTAGE 415 +/- 6%, WINDING CONNECTION DELTA, NO. OF POLES: 4 FRAME SIZE: 315L MOUNTING: B3, DUTY: S1 METHOD OF STARTING DOL INSULATION CLASS: F, COOLING: TEFC TEMPERATURE CLASS: T3 GAS GROUP: IIA, IIB, EXPLOSION PROTECTION: EX D INGRESS PROTECTION: IP55, FULL LOAD RPM: 1490 BEARING TYPE: NU319C3 / 6319C3 (DE/NDE), THERMISTOR: NOT REQUIRED, VPI: YES"			EA	1									
8	6503120213	MTR, MONTING, 160 M, Y, 55, 4, 3 PH, 1460, 11 KW <u>Long Text:</u> "MOTOR, ELECTRIC, MOUNTING: B3, FRAME SIZE: 160M, INSULATION CLASS: F, INGRESS PROTECTION: IP55, NO. OF POLES: 4, CLASSIFICATION HAZARD: EXD, FREQUENCY: 50 HZ, PHASE: 3 PH, SPEED: 1460, POWER RATING: 11 KW, MOTOR TAG NO.: 117-PM-804 NAME: HYDRAULIC OIL PUMP FOR MIXER, KW: 11 VOLTAGE: 415 +/- 10%, WINDING CONNECTION: DELTA, NO. OF POLES: 4 FRAME SIZE: 160M MOUNTING: B3 DUTY: S1, METHOD OF STARTING: DOL INSULATION CLASS F COOLING: TEFC, TEMPERATURE CLASS: T4 GAS GROUP: IIC EXPLOSION PROTECTION, EX D INGRESS PROTECTION: IP55 FULL LOAD RPM: 1460, BEARING TYPE: AS PER MANUFACTURER THERMISTOR: NOT REQUIRED, VPI: YES"			EA	1									

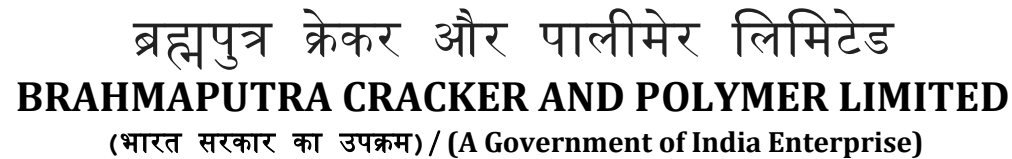

ई-निविदा संख्या / e-TENDER No: BCPL/C&P/LE17S495BB/01316 FOR "PROCUREMENT OF SPARE MOTORS FOR LLDPE / HDPE UNIT" OF BCPL, LEPETKATA.

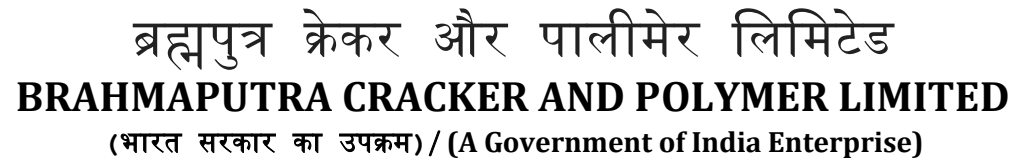


ई-निविदा संख्या / e-TENDER No: BCPL/C&P/LE17S495BB/01316 FOR "PROCUREMENT OF SPARE MOTORS FOR LLDPE / HDPE UNIT" OF BCPL, LEPETKATA.



ब्रह्मपुत्र क्रेकर और पालीमेर लिमिटेड
BRAHMAPUTRA CRACKER AND POLYMER LIMITED
(भारत सरकार का उपक्रम) / (A Government of India Enterprise)

15	6503010033	MTR, MONTING, 160M, Y, 55, 2, 3 PH, 2920, 11 KW <u>Long Text:</u> "MOTOR, ELECTRIC, MOUNTING: B3, FRAME SIZE: 160M, INSULATION CLASS: F, INGRESS PROTECTION: IP55, NO. OF POLES: 2, CLASSIFICATION HAZARD: EXD, FREQUENCY: 50 HZ, PHASE: 3 PH, SPEED: 2920, POWER RATING: 11 KW, MOTOR TAG NO: 117-KM-815 NAME: ADDITIVE VENT FILTER FAN KW: 11, VOLTAGE 415 +/- 6%, WINDING CONNECTION: DELTA NO.OF POLES: 2, FRAME SIZE 160M MOUNTING B3 DUTY S1 METHOD OF STARTING: DOL, INSULATION CLASS: F COOLING: TEFC TEMPERATURE CLASS T3, GAS GROUP: IIA, IIB EXPLOSION PROTECTION: EX D, IP55, FULL LOAD RPM: 2920 BEARING TYPE: 6209-2Z/C3 THERMISTOR, NOT REQUIRED VPI: YES"			EA	1									
16	6503110123	MTR, MONTING, 80 MA, Y, 55, 2, 3 PH, 2830, 0.75 KW <u>Long Text:</u> "MOTOR, ELECTRIC, MOUNTING: B3, FRAME SIZE: 80MA, INSULATION CLASS: F, INGRESS PROTECTION: IP55, NO. OF POLES:2, CLASSIFICATION HAZARD:EXD ,FREQUENCY:50 HZ,PHASE:3 PH, SPEED:2830 ,POWER RATING:.75 KW, MOTOR TAG NO.: 117-OEM-470 NAME: OIL MIST ELIMINATOR, FOR RG COMPRESSOR KW: 0.75 VOLTAGE: 415 +/- 6%, WINDING CONNECTION: DELTA NO. OF POLES : 2 FRAME , SIZE 80MA MOUNTING: B3 DUTY: S1 METHOD OF STARTING: DOL , INSULATION CLASS : F COOLING : TEFC TEMPERATURE CLASS : T4, GAS GROUP : IIB EXPLOSION PROTECTION : EX D IP55 , FULL LOAD RPM 2830 BEARING TYPE:6205-2Z/C36204-2Z/C3(DE/NDE), THERMISTOR : NOT REQUIRED VPI : YES"			EA	1									
17	6503110113	MTR, MONTING, 80MA, Y, 55, 2, 3 PH, 2830, 0.75 KW <u>Long Text:</u> "MOTOR, ELECTRIC, MOUNTING: B3, FRAME SIZE: 80MA, INSULATION CLASS: F, INGRESS PROTECTION: IP55, NO. OF POLES: 2, CLASSIFICATION HAZARD: EXD, FREQUENCY: 50 HZ, PHASE: 3 PH, SPEED: 2830, POWER RATING: 0.75 KW, MOTOR TAG NO.: 117-OEM-480 NAME: OIL MIST ELIMINATOR, FOR VRU COMPRESSOR KW: 0.75 VOLTAGE: 415 +/- 6%, WINDING CONNECTION: DELTA NO. OF POLES: 2, FRAME SIZE: 80MA MOUNTING: B3 DUTY: S1, METHOD OF STARTING: DOL INSULATION CLASS: F, COOLING: TEFC TEMPERATURE CLASS: T4 GAS GROUP: IIB, EXPLOSION PROTECTION: EX D INGRESS PROTECTION: IP55, FULL LOAD RPM: 2830 BEARING TYPE: 6205-2Z/C3, (DE/NDE) THERMISTOR: NOT REQUIRED VPI: YES"			EA	1									

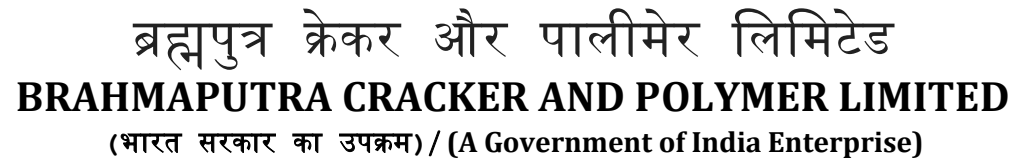

ई-निविदा संख्या / e-TENDER No: BCPL/C&P/LE17S495BB/01316 FOR "PROCUREMENT OF SPARE MOTORS FOR LLDPE / HDPE UNIT" OF BCPL, LEPETKATA.